


Price List


Aeris 3Dee

The Aeris 3Dee prices are determined by the frame colour and the different seat and backrest covers.

Seat and backrest cover	Aeris 3Dee (black frame) Recommended retail price in EUR excl. VAT	Aeris 3Dee (high gloss polished frame) Recommended retail price in EUR excl. VAT
Recycled Post-Consumer Polyester (Cura, Gabriel)	€ 839.50	€ 948.74
Wool blend (Select, Gabriel)	€ 873.11	€ 982.35
Microfibre (Comfort, Gabriel)	€ 889.92	€ 999.16
Leather (Atlantic, Heller-Leder)	€ 1066.39	€ 1175.63

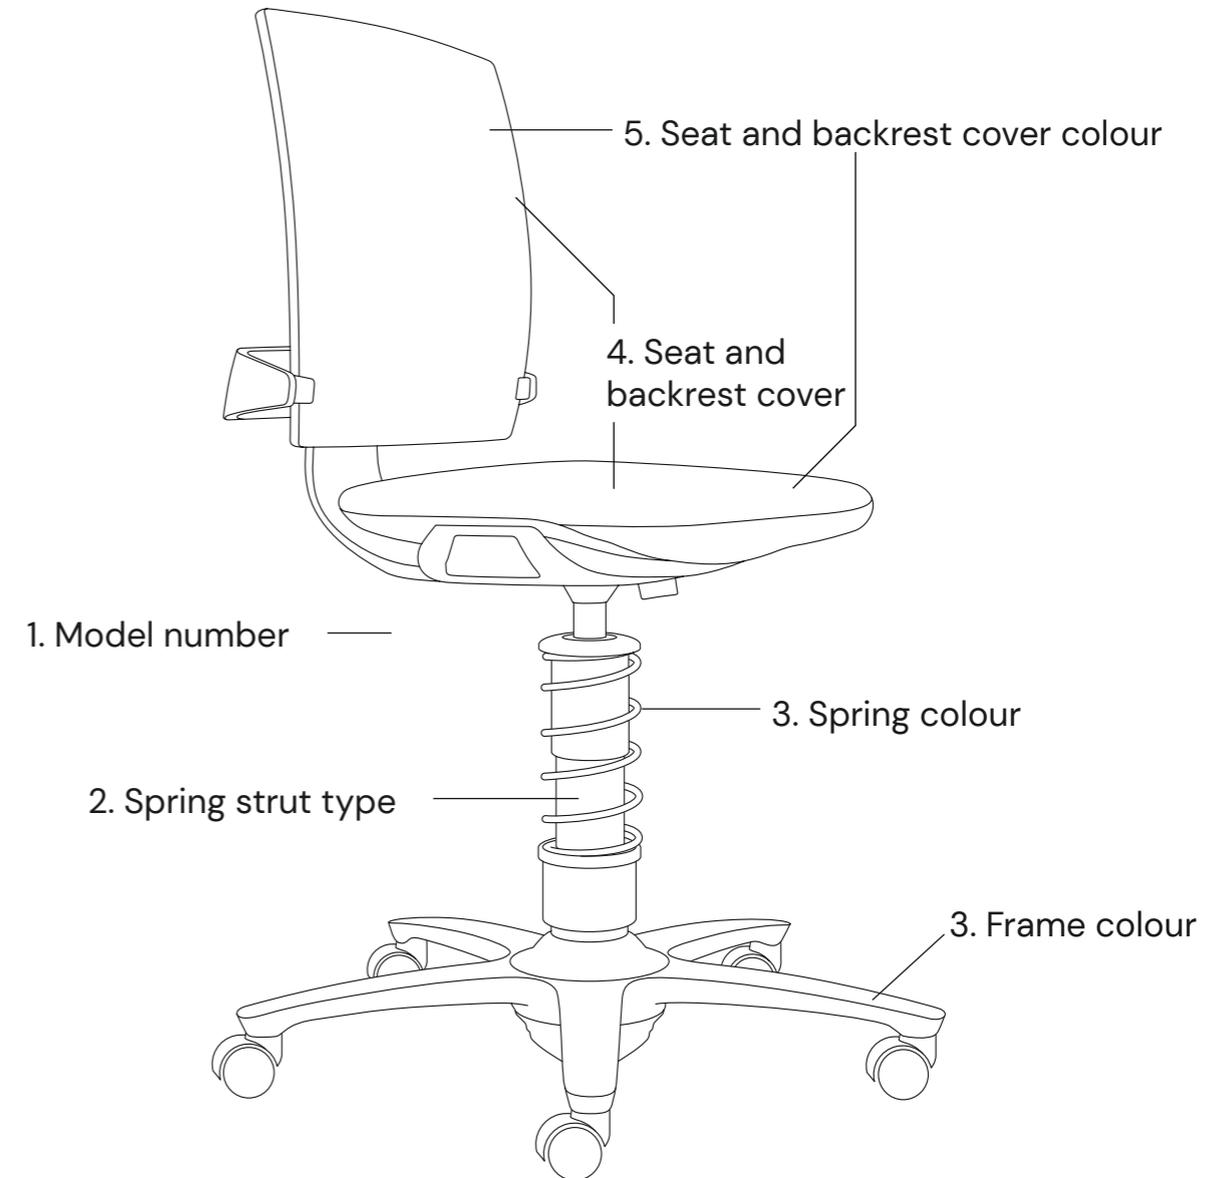

Components of the Aeris 3Dee article number easily explained.

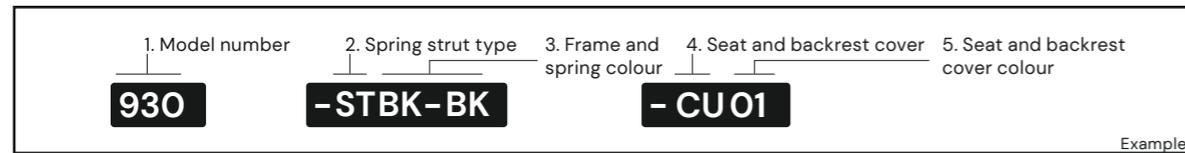

1. Model number	
	Article code
3Dee	930

2. Spring strut type	
	Article code
Standard*: Body weight: 50 - 120 kg Height adjustment range under load: 45 - 59 cm Height adjustment range without load: 52 - 66 cm	- ST

* According to DIN EN 1335

3. Frame and spring colour	
	Article code
Frame colour: black Spring colour: black	BK - BK
Frame colour: high gloss polished Spring colour: chrome polished	PL - CG

4. Seat and backrest cover	
	Article code
Recycled Post-Consumer Polyester (Cura, Gabriel)	- CU
Wool blend* (Select, Gabriel)	- SE
Microfibre (Comfort, Gabriel)	- CM
Leather (Atlantic, Heller-Leder)	- LA

5. Seat and backrest cover colour	
-----------------------------------	--

Please first select the seat and backrest cover colour for the Aeris 3Dee. The relevant article code (Aeris colour code) can be found on the following pages. Simply put it behind the article code of the seat and backrest cover (without hyphen).

Aeris 3Dee Fabric sample overview


Select / Gabriel




Comfort / Gabriel



Cura / Gabriel

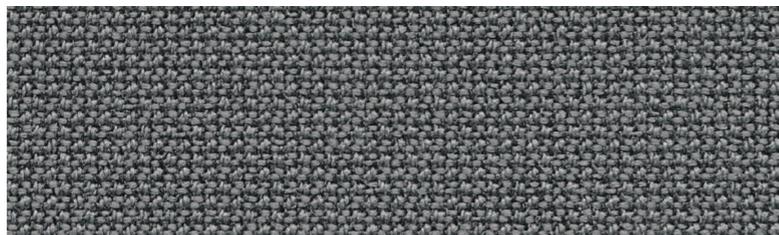

Atlantic / Heller-Leder

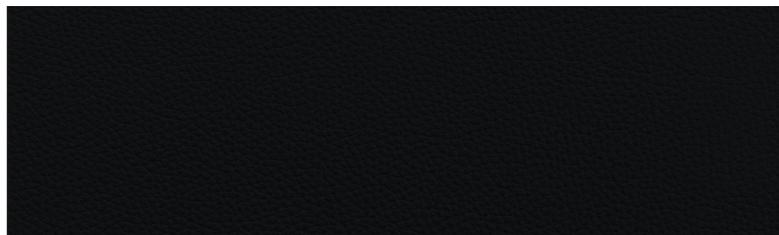

SE01, black
60999



CM01, black
0050



CM02, grey
1012



CM03, red
1414



CM04, blue
66004




CM05, green
8397




CU01, black
60111



CU02, grey
melange
60110




CU04, blue
melange
66167



CU14, fern green
melange
68181



CU17, light grey
melange
60112



LA01, black
35002 999




Gabriel Select features

This impressive material boasts an elegant simplicity that is accompanied by an allround user-friendly design. With an extensive full spectrum color palette, it offers an almost endless variety of possibilities for design, making it fits perfectly with a wide variety of furnishing styles.

Thanks to its superior abrasion resistance, measured by an impressive 200,000 Martindale cycles, this material is extremely durable and resistant, even in heavy-duty environments. It is therefore an ideal choice for Highly frequented rooms such as public areas, offices or restaurants that require a durable solution.

The environmental friendliness of these materials is confirmed by the EU Ecolabel, which makes its production sustainable and environmentally friendly. It also fulfills the STANDARD 100 of OEKO-TEX®, which means that it has been tested for possible harmful substances is considered safe for human use.

Select-Specifications

Design no.	2498	
Composition	85% New Zealand wool / 15% polyamide	
Weight	g/lm 510 oz/lin.yd 16.45	
Width	cm 140 inches 55	
Abrasion	rubs martindale (EN ISO 12947-2) 200.000 ASTM D4966 Martindale (heavy duty) rubs martindale (ASTM D4966) (heavy duty upholstery) 100.000 Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan	
Pilling	scale 1-5, max. 5 - EN ISO 12945-2 ASTM D4970 Pilling pass	4
Light fastness	scale 1-8, max. 8 - EN ISO 105-B02 AATCC 16 Light fastness pass	5-8
Rubbing fastness	scale 1-5, max. 5 - EN ISO 105x12 (dry/wet) AATCC 8 or 116 Dry/wet crocking	4-5/4-5 pass
Care instructions	dry cleaning P(S) 	
Flammability	BS EN 1021-1 Cigarette BS EN 1021-2 Match BS 5852 Part 1 Q,1 Cigarette & Match, The Furniture and Furnishing Regulations 1988 BS 5852 Crib 5 IMO MSC 307(88) Annex 1 part 8 MED Certificate IMO IMO MSC 307(88) Annex 1 part 8 UK MED Certificate IMO UK CA TB 117-2013 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals..	
Environment	OEKO-TEX® STANDARD 100 EU Ecolabel	

Gabriel Comfort features

The high-quality fabric was specially developed for intensive use and has outstanding properties. With an impressive Martindale value of 150,000, it is extremely hard-wearing and resistant to abrasion.

Thanks to the use of carbon fibers, the fabric is permanently antistatic, which means that it hardly collects any dust and is therefore particularly easy to clean. Furthermore it is dirt-repellent and water and oil repellent, making it extremely resistant to soiling.

Another plus is its openness to diffusion, which means that the fabric enables excellent air and moisture exchange and thus counteracts the formation of mold.

Safety is a top priority with this fabric, as it is permanently fire-resistant - a property achieved by fire-retardant fibers. It therefore offers a high level of safety and protection.

For the environmentally conscious buyer, it is important to know that this fabric contains 37% recycled fibers, which contributes to the sustainable use of resources.

And to top it all off, the fabric manufacturer offers a generous 10- year guarantee against abrasion and pilling, which further reinforces confidence in the quality of this product.

The fabric also meets the requirements of the renowned STANDARD 100 by OEKO-TEX®, which means that it has been tested for harmful substances and is considered safe for human use.

Comfort-Specifications

Design no.	8580	
Composition	51% polyester/37% post-consumer rec.pes./ 12% polyurethane incl. antistatic fibers and fire retardant fibers in the backside	
Weight	g/lm 385 oz/lin.yd 12.42	
Width	cm 140 inches 55	
Abrasion	rubs martindale (EN ISO 12947-2) 150.000 Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan	
Pilling	scale 1-5, max. 5 - EN ISO 12945-2	5
Light fastness	scale 1-8, max. 8 - EN ISO 105-B02	5-7
Rubbing fastness	scale 1-5, max. 5 - EN ISO 105x12 (dry/wet)	4/4-5
Care instructions	wash or dry cleaning P(W) most stains can be removed by brushing with a suede brush or using an eraser. or use a solution of luke-warm water and a neutral detergent. 74°C shrinkage max. 2,5%.  60°C shrinkage max. 2%. 	
Flammability	BS EN 1021 1&2 Cigarette and Match BS EN 1021-1 Cigarette ÖNORM A3800-B2-B3825-Q1 UK NF P 92-503 M3 CA TB 117-2013 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.	
Environment	OEKO-TEX® STANDARD 100	

Gabriel Cura features

The Cura fabric cover is characterized by a warm, casual aesthetic that is complemented by a lively melange effect and a soft, voluminous texture.

But this material is not only visually appealing - its high stretchability enables flexible use, making it perfect for office and lounge furniture. But what makes this material special is its sustainability. As much as 98% of the material is made from recycled post-consumer polyester, which makes a significant contribution to reducing waste. In addition, the entire material is 100% recyclable and therefore contributes to a closed-loop economy.

But this material also scores highly in terms of ecological standards. The EU Ecolabel shows that it meets strict environmental criteria and is therefore an environmentally friendly choice. It also fulfills meets the requirements of STANDARD 100 by OEKO-TEX®, which means that it has been tested for possible harmful substances and is considered safe for human use.

Cura-Specifications

Design no.	2480/2544		
Composition	100% post-consumer recycled polyester		
Weight	g/lm 420 oz/lin.yd 55		
Width	cm 140 inches 55		
Abrasion	rubs Martindale (EN ISO 12947-2) 100.000 Double Rubs Wyzenbeek (ASTM D4157-07) (heavy duty upholstery) 100.000 ASTM D4157-07 Wyz-abrasion (heavy duty) 100k pass Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan		
Pilling	scale 1-5, max. 5 - EN ISO 12945-2 ASTM D3511 Pilling pass		4-5
Light fastness	scale 1-8, max. 8 - EN ISO 105-B02 AATCC 16 Light fastness pass		5-8
Rubbing fastness	scale 1-5, max. 5 - EN ISO 105x12 (dry/wet) AATCC 8 oder 116 Dry/wet crocking		4-5/4-5 pass
Care instructions	wash or dry cleaning P(W) Cura is made of polyester which is a material suited for environments with special requirements for cleaning.  40°C shrinkage max. 1%.  60°C shrinkage max. 2%.		
Flammability	BS EN 1021 1&2 Cigarette and Match CA TB 117-2013 ASTM E 84 Class 1 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.		
Environment	OEKO-TEX® STANDARD 100 EU Ecolabel		

Heller-Leder Atlantic features

The ideal upholstery for the office - Atlantic leather not only impresses with its high quality and beautiful surface embossing, but also offers optimum seating comfort. The soft leather is easy to care for, breathable and is characterised by its antistatic properties.

Atlantic-Specifications

Test	Test Method	Measurement Unit	Guaranteed
Tear strength - Single edge tear	UNI EN ISO 3377-1	N	> = 20
Colour fastness to rubbing - Dry 500 Cycles	UNI EN ISO 11640:1998	Grey Scale	> = 4
Colour fastness to rubbing - Wet 250 Cycles	UNI EN ISO 11640:1998	Grey Scale	> = 4
Colour fastness to rubbing - Sweat 80 Cycles	UNI EN ISO 11640:1998 ISO 11641 pH8	Grey Scale	> = 4
Flexing endurance - Dry 50.000 Cycles	UNI EN ISO 5402		No damage
Finish Adhesion - Dry	UNI EN ISO 11644	N/cm	> = 2
Colour fastness to artificial light - Exposition energy 16.000kj/sqm	UNI EN ISO 105 B02 (MET.5)	Blue Scale	> = 5
Smolder resistance, cigarette and match flame	CAL TB-117 (2013, Sec. 1) BS 5852: 1979, source O-1 BS EN 1021-1-2:2006		Pass

Notes

Subject to technical change and model modifications.
Colours may vary slightly from batch to batch. Freight costs on request. The valid general terms and conditions of Aeris GmbH apply. The Price List 03/2025 renders all previous price lists invalid. No liability is taken for errors, printing errors and changes in prices or product specifications. Please note, that not all products are available in all countries. If you have any questions, please contact the Aeris team.